


Heavy duty U- Bolts are designed to secure, guide or support plain and insulated piping. These U-Bolts are used in various piping application, like suspension of horizontal insulated piping, for gripping horizontal insulated pipes and these are also used as a guide for vertical insulated piping.

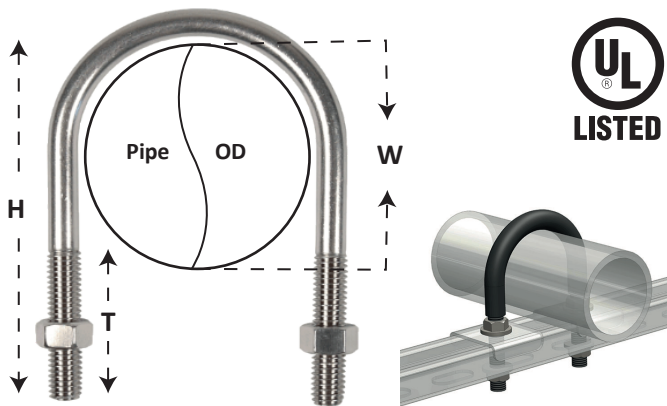

**Material :** Steel

**Finish :** Electrogalvanised post manufacture

**Options :** U-Bolts with EPDM sleeve (suffix 'R')

Hot Dip Galvanized finish (suffix 'HDG')

Zinc Flake finish (suffix 'ZF')

Stainless Steel construction (suffix 'SS')

**Compliance :** US Standards MSS-SP58 (Type 24)

MSS-SP69

Federal Specification : WW-H-171E & A-A-1192A (Type 24)

**Electro-Galvanized :** finish as per ASTM B633 SC3

BS1706 FE/ZN12

**Underwriter's Laboratories (UL)** Listed for sizes ¾" to 12"

Apart from the models listed in the table below, a full range in intermediate sizes are available to match the effective ODs of G-Fix RSI. This will further enhance the quality of the installation.

SELECTION TABLE FOR G-FIX U-BOLTS

Model	Steel Nominal		Pipe	Material Dimension (mm)			Bolt Size (mm) A	Max Load (kg)
	In	mm	OD (mm)	U Bolt Dia (W)	Height (H)	Thread Length (T)		
GFUB 1/2" (22mm)	1/2"	15	21.3	21	65	50	M10	550
GFUB 3/4" (27mm)	3/4"	20	26.7	27	77	50	M10	550
GFUB 1" (34mm)	1"	25	33.4	34	85	50	M10	550
GFUB 1 1/4" (42mm)	1 1/4"	32	42.1	43	93	50	M10	550
GFUB 1 1/2" (48mm)	1 1/2"	40	48.2	48	100	50	M10	550
GFUB 2" (60mm)	2"	50	60.3	60	110	50	M10	550
GFUB 2 1/2" (73mm)	2 1/2"	65	73	76	127	50	M12	900
GFUB 3" (89mm)	3"	80	88.9	89	140	50	M12	900
GFUB 4" (114mm)	4"	100	114.3	115	165	50	M12	900
GFUB 5" (141mm)	5"	125	141.3	140	190	50	M12	900
GFUB 6" (168mm)	6"	150	168.3	168	220	50	M12	900
GFUB 8" (219mm)	8"	200	219.1	219	295	75	M16	1900
GFUB 10" (273mm)	10"	250	273	273	370	100	M20	3200
GFUB 12" (323mm)	12"	300	323.8	324	420	100	M20	3200
GFUB 14" (356mm)	14"	350	355.6	356	455	100	M20	3200
GFUB 16" (406mm)	16"	400	406.4	406	505	100	M20	3200
GFUB 18" (457mm)	18"	450	457.2	457	555	100	M24	4400
GFUB 20" (508mm)	20"	500	508	508	605	100	M24	4400
GFUB 24" (610mm)	24"	600	609.6	610	710	100	M24	4400

\*\*\* Product specifications are subject to change without prior notice.